


THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF MICROSTRAIN INC. AND SHALL NOT BE REPRODUCED WITHOUT PERMISSION FROM MICROSTRAIN INC.

REVISIONS 1002-0002			
REV	DESCRIPTION	DATE	APVD

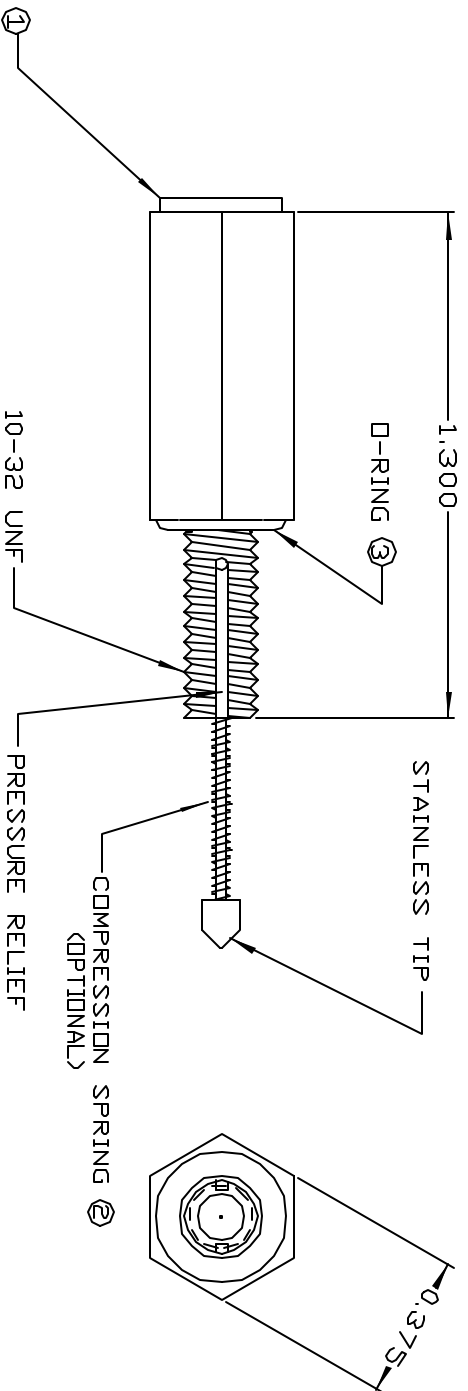

- NOTES:
1. KEYPED STRAIN RELIEVED CONNECTOR
 2. SPRING RATE AVAILABLE IN 1.5 & 3.0 LBS/IN
 3. VITON O-RING FOR HI-PRESSURE SEALING

UNLESS OTHERWISE SPECIFIED, DIMS. ARE IN INCHES. TOLERANCES (UNLESS OTHERWISE SPECIFIED):		DATE	4/11/97	
FRACTIONS: +/- 1/64		DRAWN BY	S. MUNDALL	
DECIMALS: XX = +/- 0.01		CHK BY		
XXX = +/- 0.005		APVD BY		
ANGLES: +/- 0.5 deg		APVD BY		
SURFACE FINISH: 63 MICRONS		APVD BY		
		TITLE	M-DVRT-PE-3	
		SIZE	DRAWING NO.	REV
		A	1002-0002	-
SCALE 2:1		SHEET 1 OF 1		