



CHASSIS MOUNTING HOLE PATTERN

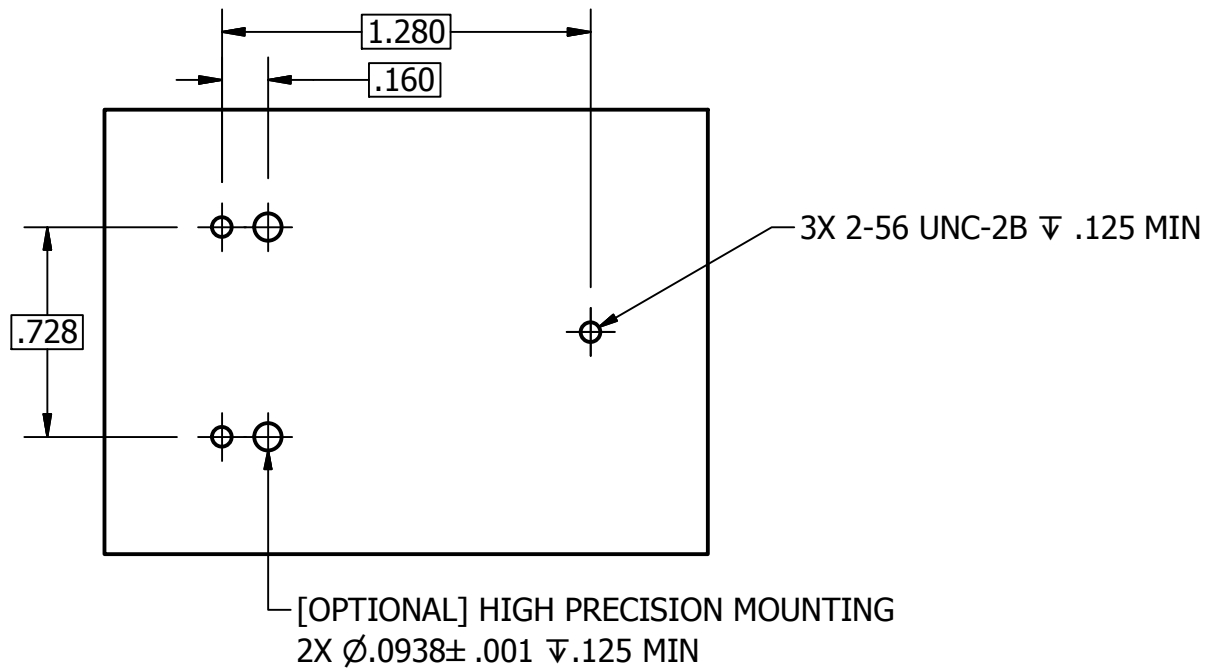



3X MOUNTING FASTENER
 2-56 x 1/2" button head screw
 300 series stainless (see note 2)
 e.g. McMaster 90910A782
 Torque to 2in*lbs

Example cable shown:
 SAMTEC FFSD-05-D-04.00-01-N-R

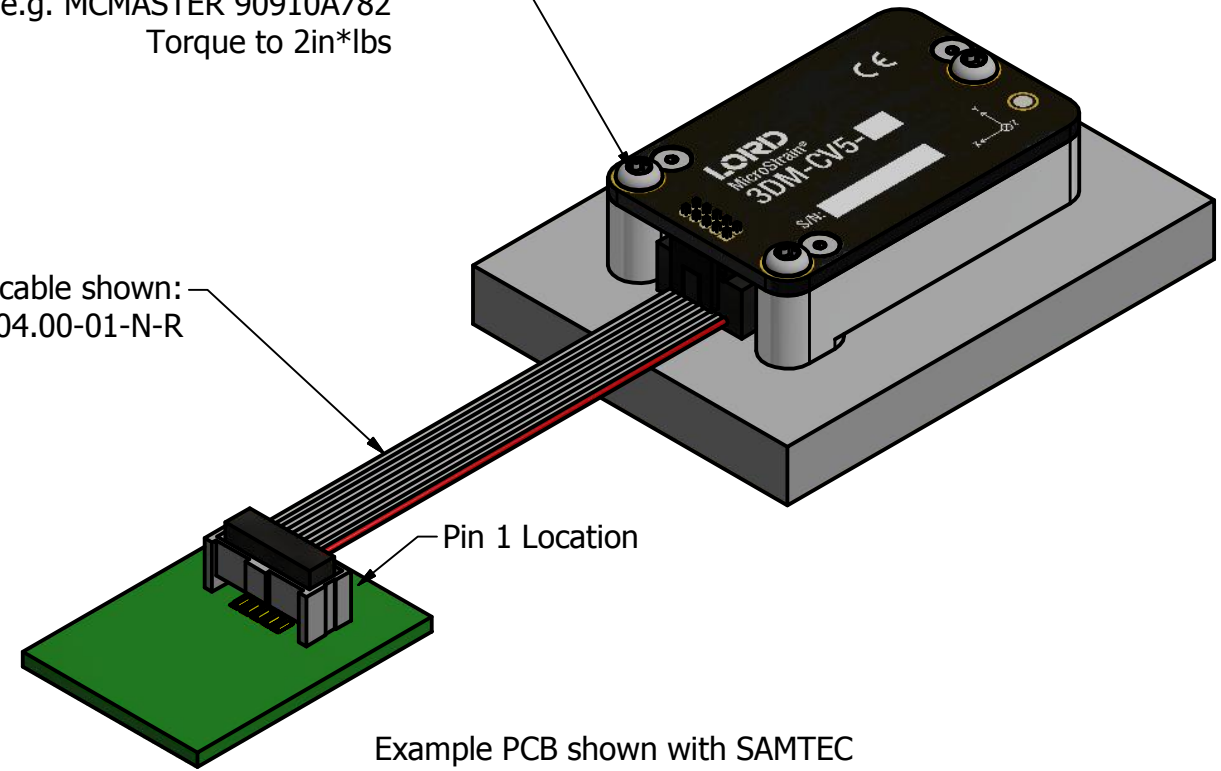


Example PCB shown with SAMTEC
 SHF-105-01-L-D-SM see NOTE 1

NOTE 1: Alternative cable connectors include SAMTEC p/ns:
 EHF-105-01-L-D-SM-LC
 EHF-105-01-L-D-SM
 SHF-105-01-L-D-SM-LC

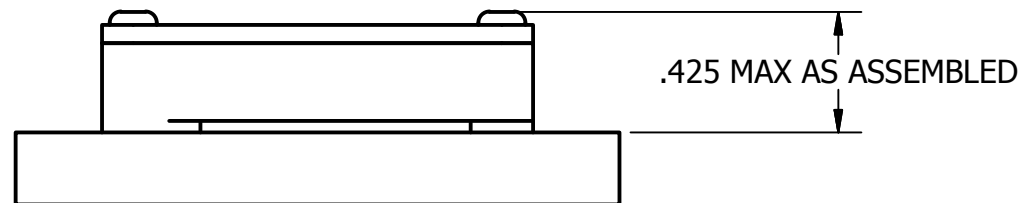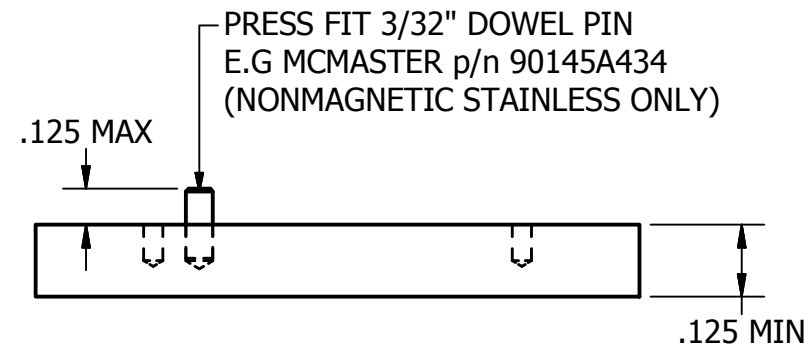

SHEET 3/4 CHASSIS MOUNTING OPTION



THIRD ANGLE PROJECTION

PROPRIETARY NOTICE THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO LORD CORPORATION AND SHALL NOT BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OR USED FOR ANY DESIGN OR MANUFACTURE EXCEPT WHEN SUCH USER POSSESSES DIRECT, WRITTEN AUTHORIZATION FROM LORD CORPORATION.		UNLESS OTHERWISE SPECIFIED F.M.P. = FOR MANUFACTURING PURPOSES ALL DIMENSIONS ARE TO POINTS OF INTERSECTION DIMENSIONING/TOLERANCING PER ASME Y14.5 - 2009 ABBREVIATIONS, ACRONYMS, TERMINOLOGY PER TS-027 MACHINED SURFACES = 125µin (3.2µm) MAX BREAK ALL SHARP EDGES .005in - .025in (0.1mm - 0.6mm) AVERAGING OF DIAMETERS NOT PERMISSIBLE ALL DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE IN MILLIMETERS		LORD CORPORATION Williston, VT 05495		DWG TYPE EC
SURFACE AREA (SQ. IN.)		CALC. WT. (LB.)	3065-0242-ICD	DR. BY KYLE WERNER		INTERFACE CONTROL DRAWING 3DM-CV5 (-10, -15, -25)
		VOL (CU. IN.)		CKD. BY	DRAWING NO. 3065-0254-ICD	
				ENGR. APPR.		
				MFG. APPR.	CAGE OXYZ9	
				Q.E. APPR.	SH 3 OF 4	

LORD PROPRIETARY