

## 3DM-GX3-35™

### Attitude Heading Reference System (AHRS) with GPS




3DM-GX3-35™ - lower cost, miniature, industrial-grade attitude heading and reference system (AHRS) with integrated GPS and magnetometers, and high data output rates

The LORD MicroStrain® family of **industrial** and **tactical grade inertial sensors** provides a wide range of triaxial inertial measurements and computed attitude and navigation solutions.

In all models, the Inertial Measurement Unit (IMU) includes direct measurement of acceleration, angular rate, and atmospheric pressure. Sensor measurements are processed through an on-board processor running a sophisticated estimation filter or fusion algorithm to produce high accuracy computed outputs with compensation options for magnetic and linear acceleration anomalies, sensor biases, auto-zero update, and noise offsets. The computed outputs vary between models and can include pitch, roll, yaw, a complete attitude, heading, and reference solution (AHRS) or a complete position, velocity and attitude solution (PVA), as well as integrated GNSS outputs. All sensors are fully temperature compensated and calibrated over the operating temperature. The use of Micro-Electro-Mechanical System (MEMS) technology allows for highly accurate, small, lightweight devices.

The LORD MicroStrain® MIP™ Monitor software can be used for device configuration, live data monitoring, and recording. Alternatively, the MIP™ Data Communications Protocol is available for development of custom interfaces and easy OEM integration.

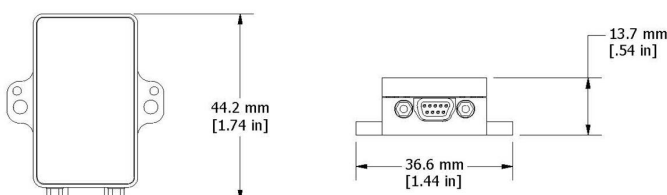

### Product Highlights

- High performance integrated GPS receiver and MEMS sensor technology provide direct satellite and inertial measurements, and computed attitude and heading outputs in a small package
- Triaxial accelerometer, gyroscope, magnetometer, and temperature sensors achieve the best combination of measurement qualities
- On-board processor runs a sophisticated Complimentary Filter (CF) fusion algorithm for precise attitude estimates and inertial measurements
- Sampling rates up to 30 KHz and data output up to 1 KHz
- Ideal for applications that implement custom Kalman Filters

### Features and Benefits

#### Best in Class Performance

- Fully calibrated, temperature-compensated, and mathematically-aligned to an orthogonal coordinate system for highly accurate outputs

#### Ease of Use

- Easy integration via comprehensive and fully backwards-compatible communication protocol
- Common protocol between 3DM-GX3, GX4, RQ1, GQ4, and GX5 inertial sensor families for easy migration

#### Cost Effective

- Out-of-the box solution reduces development time
- Volume discounts

### Applications

- GPS-aided navigation system
- Unmanned vehicle navigation
- Platform stabilization, artificial horizon
- Antenna and camera pointing
- Health and usage monitoring of vehicles

# 3DM-GX3-35™ Attitude Heading Reference System (AHRS) with GPS

## Specifications

General			
<b>Integrated sensors</b>	Triaxial accelerometer, triaxial gyroscope, triaxial magnetometer, and temperature sensors,		
<b>Data outputs</b>	<b>Inertial Measurement Unit (IMU) outputs:</b> acceleration, angular rate, magnetic field, deltaTheta, deltaVelocity  <b>Computed outputs:</b> LLH position, NED velocity, attitude estimates (in Euler angles, quaternion, orientation matrix)		
<b>Resolution</b>	16 bit SAR oversampled to 17 bits		
Inertial Measurement Unit (IMU) Sensor Outputs			
	Accelerometer	Gyroscope	Magnetometer
<b>Measurement range</b>	±5 g (standard) ±1.7, ±16, and ±50g (option)	300°/sec (standard) ±50, ±600, ±1200 °/sec (options)	±2.5 Gauss
<b>Non-linearity</b>	±0.1 % fs	±0.03 % fs	±0.4% fs
<b>Bias instability</b>	±0.04 mg	18°/hr	--
<b>Initial bias error</b>	±0.002 g	±0.25°/sec	±0.003 Gauss
<b>Scale factor stability</b>	±0.05 %	±0.05 %	±0.1 %
<b>Noise density</b>	80 µg/√Hz	0.03°/sec/√Hz	100 µGauss/√Hz
<b>Alignment error</b>	±0.05°	±0.05°	±0.05°
<b>Adjustable bandwidth</b>	225 Hz (max)	440 Hz (max)	230 Hz (max)
<b>IMU filtering</b>	Digitally filtered (user adjustable) and scaled to physical input; coning and sculling integrals computed at 1 kHz		
<b>Sampling rate</b>	30 kHz	30 kHz	7.5 kHz
<b>IMU data output rate</b>	1 Hz to 1000 Hz		

Computed Outputs	
<b>Attitude accuracy</b>	±0.5° roll, pitch, and heading (static, typ), ±2.0° roll, pitch, and heading (dynamic, typ)
<b>Attitude heading range</b>	360° about all axes
<b>Attitude resolution</b>	< 0.01°
<b>Attitude repeatability</b>	0.2° (typ)
<b>Calculation update rate</b>	1000 Hz
<b>Computed data output rate</b>	1 Hz to 500 Hz
Global Positioning System (GPS) Outputs	
<b>Receiver type</b>	50-channel, L1 frequency, C/A code SBAS: WAAS, EGNOS, MSAS
<b>GPS data output rate</b>	1 Hz to 4 Hz
<b>Time-to-first-fix</b>	Cold start: 27 second, aided start: 4 second, hot start: 1 second
<b>Sensitivity</b>	Tracking: -159 dBm, cold start: -147 dBm, hot start: -156 dBm
<b>Velocity accuracy</b>	0.1 m/sec
<b>Heading accuracy</b>	0.5°
<b>Horizontal position accuracy</b>	GPS: 2.5 m CEP SBAS: 2.0 m CEP
<b>Time pulse signal accuracy</b>	30 nsec RMS < 60 nsec 99%
<b>Acceleration limit</b>	≤ 4 g
<b>Altitude limit</b>	No limit
<b>Velocity limit</b>	500 m/sec (972 knots)
Operating Parameters	
<b>Communication</b>	USB 2.0 (full speed) RS232 (9,600 bps to 921,600 bps, default 115,200)
<b>Power source</b>	+ 3.2 to + 16 V dc
<b>Power consumption</b>	200 mA (typ), 250 mA (max) - Vpri = 3.2 V dc to 5.5 V dc 850 mW (typ), 1000 mW (max) - Vaux = 5.2 V dc to 16 V dc
<b>Operating temperature</b>	-40 °C to +65 °C
<b>Mechanical shock limit</b>	500 g
Physical Specifications	
<b>Dimensions</b>	44.2 mm x 24.0 mm x 36.6 mm
<b>Weight</b>	23 grams
<b>Enclosure material</b>	Aluminum
Integration	
<b>Connectors</b>	Data/power output: micro-DB9 MMCX type
<b>Software</b>	MIP™ Monitor, MIP™ Hard and Soft Iron Calibration, Windows XP/Vista/7/8 compatible
<b>Compatibility</b>	Protocol compatibility across 3DM-GX3, GX4, RQ1, GQ1, and GX5 product families
<b>Software development kit (SDK)</b>	MIP™ data communications protocol with sample code available (OS and platform independent)

**LORD SENSING**  
MicroStrain

LORD Corporation  
MicroStrain® Sensing Systems  
459 Hurricane Lane, Suite 102  
Williston, VT 05495 USA

ph: 802-862-6629  
[sensing\\_sales@LORD.com](mailto:sensing_sales@LORD.com)  
[sensing\\_support@LORD.com](mailto:sensing_support@LORD.com)