

## 3DM-GX4-15™

### Inertial Measurement and Vertical Reference Unit (IMU/VRU)



3DM-GX4-15™ - miniature industrial-grade inertial measurement unit (IMU) and vertical reference unit (VRU) with high noise immunity, and exceptional performance

The LORD MicroStrain® family of **industrial** and **tactical grade inertial sensors** provides a wide range of triaxial inertial measurements and computed attitude and navigation solutions.

In all models, the Inertial Measurement Unit (IMU) includes direct measurement of acceleration, angular rate, and atmospheric pressure. Sensor measurements are processed through an on-board processor running a sophisticated estimation filter or fusion algorithm to produce high accuracy computed outputs with compensation options for magnetic and linear acceleration anomalies, sensor biases, auto-zero update, and noise offsets. The computed outputs vary between models and can include pitch, roll, yaw, a complete attitude, heading, and reference solution (AHRS) or a complete position, velocity and attitude solution (PVA), as well as integrated GNSS outputs. All sensors are fully temperature compensated and calibrated over the operating temperature. The use of Micro-Electro-Mechanical System (MEMS) technology allows for highly accurate, small, lightweight devices.

The LORD MicroStrain® MIP™ Monitor software can be used for device configuration, live data monitoring, and recording. Alternatively, the MIP™ Data Communications Protocol is available for development of custom interfaces and easy OEM integration.

## Product Highlights

- High performance integrated MEMS sensor technology provide direct inertial measurements, and computed vertical reference outputs in a small package
- Triaxial accelerometer, gyroscope, temperature sensors, and a pressure altimeter achieve the best combination of measurement qualities
- Dual on-board processors run a sophisticated Adaptive Kalman Filter (AKF) for excellent static and dynamic inclination estimates and inertial measurements

## Features and Benefits

### Best in Class Performance

- Fully calibrated, temperature-compensated, and mathematically-aligned to an orthogonal coordinate system for highly accurate outputs
- Bias tracking, error estimation, threshold flags, and adaptive noise modeling allow for fine tuning to conditions in each application
- High-performance, low-drift gyros with noise density of  $0.005^\circ/\text{sec}/\sqrt{\text{Hz}}$  and VRE of  $0.001^\circ/\text{s}/g^2\text{RMS}$
- Smallest and lightest industrial IMU/VRU available

### Ease of Use


- Easy integration via comprehensive and fully backwards-compatible communication protocol
- Common protocol between 3DM-GX3, GX4, RQ1, GQ4, and GX5 inertial sensor families for easy migration

### Cost Effective

- Out-of-the box solution reduces development time
- Volume discounts

## Applications

- Platform stabilization, artificial horizon
- Antenna and camera pointing
- Health and usage monitoring of vehicles

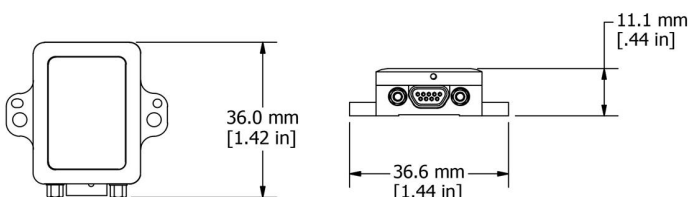

# 3DM-GX4-15™ Inertial Measurement and Vertical Reference Unit (IMU/VRU)

## Specifications

General		
<b>Integrated sensors</b>	Triaxial accelerometer, triaxial gyroscope, temperature sensors, and pressure altimeter	
<b>Data outputs</b>	<b>Inertial Measurement Unit (IMU) outputs:</b> acceleration, angular rate, ambient pressure, deltaTheta, deltaVelocity  <b>Computed outputs:</b> <b>Adaptive Kalman Filter (AKF):</b> filter status, GPS timestamp, attitude estimates (Euler angles, quaternion, orientation matrix), bias compensated angular rate, pressure altitude, gravity-free linear acceleration, attitude uncertainties, gyroscope and accelerometer bias, scale factors and uncertainties, gravity models, and more. <b>Complementary Filter (CF):</b> attitude estimates (Euler angles, quaternion, orientation matrix), north and gravity vectors, GPS correlation timestamp	
Inertial Measurement Unit (IMU) Sensor Outputs		
	Accelerometer	Gyroscope
<b>Measurement range</b>	±5 g (standard) ±16g (option)	300°/sec (standard) ±75, ±150, ±900 °/sec (options)
<b>Non-linearity</b>	±0.03 % fs	±0.03 % fs
<b>Resolution</b>	<0.1 mg	<0.008°/sec
<b>Bias instability</b>	±0.04 mg	10°/hr
<b>Initial bias error</b>	±0.002 g	±0.05°/sec
<b>Scale factor stability</b>	±0.05 %	±0.05 %
<b>Noise density</b>	100 µg/√Hz	0.005°/sec/√Hz
<b>Alignment error</b>	±0.05°	±0.05°
<b>Adjustable bandwidth</b>	225 Hz (max)	250 Hz (max)
<b>Offset error over temperature</b>	0.06% (typ)	0.05% (typ)
<b>Gain error over temperature</b>	0.05% (typ)	0.05% (typ)
<b>Scale factor non-linearity (@ 25° C)</b>	0.02% (typ) 0.06% (max)	0.02% (typ) 0.06% (max)
<b>Vibration induced noise</b>	--	0.072°/s RMS/g RMS
<b>Vibration rectification error (VRE)</b>	--	0.001°/s/g <sup>2</sup> RMS
<b>IMU filtering</b>	4 stage filtering: Analog bandwidth filter to digital sigma-delta wide band anti-aliasing filter to digital averaging filter (user adjustable) sampled at 4 kHz, and scaled into physical units; coning and sculling integrals computed at 1 kHz	
<b>Sampling rate</b>	4 kHz	4 kHz
<b>IMU data output rate</b>	1 Hz to 1000 Hz	
Pressure Altimeter		
<b>Range</b>	-1800 m to 10,000 m	
<b>Resolution</b>	<0.1 m	
<b>Noise density</b>	0.01 hPa RMS	
<b>Sampling rate</b>	25 Hz	

Computed Outputs	
<b>Roll and pitch accuracy</b>	AKF outputs: ±0.25° RMS (typical) CF outputs: ±0.5° static (typical), ±2.0° dynamic (typical)
<b>Roll and pitch range</b>	360° about all axes
<b>Roll and pitch resolution</b>	<0.01°
<b>Roll and pitch repeatability</b>	0.3° (typ)
<b>Calculation update rate</b>	500 Hz
<b>Computed data output rate</b>	AKF outputs: 1 Hz to 500 Hz CF outputs: 1 Hz to 1000 Hz
Operating Parameters	
<b>Communication</b>	USB 2.0 (full speed) RS232 (9,600 bps to 921,600 bps, default 115,200)
<b>Power source</b>	+3.2 to +36 V dc
<b>Power consumption</b>	100 mA (typ), 120 mA (max) with Vpri = 3.2 V dc to 5.5 V dc 550 mW (typ), 800 mW (max) with Vaux = 5.2 V dc to 36 V dc
<b>Operating temperature</b>	-40 °C to +85 °C
<b>Mechanical shock limit</b>	500 g (calibration unaffected) 1000 g (bias may change), 5000 g (survivability)
<b>MTBF</b>	1.2 million hours (Telcordia method I, GL/35C) 0.45 million hours (Telcordia method I, GM/35C)
Physical Specifications	
<b>Dimensions</b>	36.0 mm x 24.4 mm x 36.6 mm
<b>Weight</b>	16.5 grams
<b>Enclosure material</b>	Aluminum
<b>Regulatory compliance</b>	ROHS, CE
Integration	
<b>Connectors</b>	Data/power output: micro-DB9
<b>Software</b>	MIP™ Monitor, Windows XP/Vista/7/8 compatible
<b>Compatibility</b>	Protocol compatibility across 3DM-GX3, GX4, RQ1, GQ1, and GX5 product families
<b>Software development kit (SDK)</b>	MIP™ data communications protocol with sample code available (OS and platform independent)

**LORD SENSING**  
MicroStrain

LORD Corporation  
MicroStrain® Sensing Systems  
459 Hurricane Lane, Suite 102  
Williston, VT 05495 USA

ph: 802-862-6629  
[sensing\\_sales@LORD.com](mailto:sensing_sales@LORD.com)  
[sensing\\_support@LORD.com](mailto:sensing_support@LORD.com)