

## 3DM-GX5-25

### Attitude and Heading Reference System (AHRS)



The LORD Sensing 3DM-GX5 family of high-performing, industrial-grade inertial sensors provides a wide range of triaxial inertial measurements, computed attitude, and navigation solutions.

The 3DM-GX5-25 is the smallest and lightest industrial AHRS with an Adaptive Kalman Filter available. It features a triaxial accelerometer, gyroscope, magnetometer, and temperature sensors to achieve the optimum combination of measurement qualities. The dual on-board processors run a new Auto-Adaptive Extended Kalman Filter (EKF) for outstanding dynamic attitude estimates, making it ideal for a wide range of applications, including platform stabilization and vehicle health and usage monitoring.

SensorConnect software is a user friendly program for device configuration. MIP Monitor (MicroStrain Internet Protocol) can also be used. Both packages provide for device configuration, live data monitoring, and recording. Alternatively, the MIP Data Communications Protocol is available for development of custom interfaces and easy OEM integration.

The sensor operates independent of computer platform, operating system, or coding language.

#### PRODUCT HIGHLIGHTS

- Triaxial accelerometer, gyroscope, magnetometer, temperature sensors achieve the optimal combination of measurement qualities
- Dual on-board processors run a new Auto-Adaptive Extended Kalman Filter (EKF) for outstanding dynamic attitude estimates

#### FEATURES AND BENEFITS

##### BEST IN CLASS PERFORMANCE

- Bias tracking, error estimation, threshold flags, and adaptive noise modeling allow for fine tuning to conditions in each application
- Accelerometer noise as low as  $20 \mu\text{g}/\sqrt{\text{Hz}}$
- Smallest and lightest industrial AHRS with Adaptive Kalman Filter available

##### EASE OF USE


- SensorConnect enables simple device configuration, live data monitoring, and recording
- The MSCL API allows easy integration with C++, Python, .NET, C#, Visual Basic, LabVIEW and MATLAB environments. Robust, forward compatible MIP packet protocol
- MIP open byte level communication protocol
- Automatic magnetometer calibration and anomaly rejection eliminates the need for field calibration
- Automatically compensates for vehicle noise and vibration
- Common protocol between 3DM-GX3, GX4, RQ1, GQ4, and GX5 inertial sensor families for easy migration

##### COST EFFECTIVE

- Out-of-the box solution reduces development time
- Volume discounts

##### APPLICATIONS

- Unmanned vehicle navigation
- Robotics
- Platform stabilization, artificial horizon
- Health and usage monitoring of vehicles

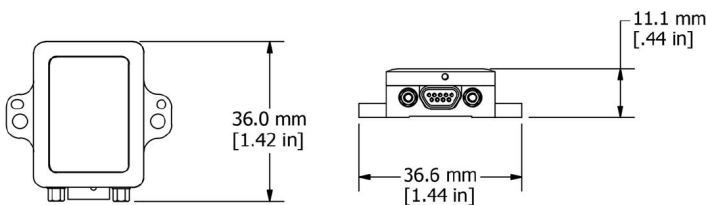

*Best in Class Inertial Measurement*

# 3DM-GX5-25 Attitude and Heading Reference System (AHRS)

## Specifications

General			
<b>Integrated Sensors</b>	Triaxial accelerometer, triaxial gyroscope, triaxial magnetometer, pressure altimeter, and temperature sensors		
<b>Data Outputs</b>	<p><b>Inertial Measurement Unit (IMU) outputs:</b> acceleration, angular rate, magnetic field, ambient pressure, Delta-theta, Delta-velocity</p> <p><b>COMPUTED OUTPUTS</b></p> <p><b>Extended Kalman Filter (EKF):</b> filter status, timestamp, attitude estimates (in Euler angles, quaternion, orientation matrix), linear and compensated acceleration, bias compensated angular rate, pressure altitude, gravity-free linear acceleration, gyroscope and accelerometer bias, scale factors and uncertainties, gravity and magnetic models, and more.</p> <p><b>Complementary Filter (CF):</b> attitude estimates (in Euler angles, quaternion, orientation matrix) stabilized, north and up vectors, GPS correlation timestamp</p>		
Inertial Measurement Unit (IMU) Sensor Outputs			
	Accelerometer	Gyroscope	Magnetometer
<b>Measurement range</b>	±8 g (standard) ±2 g, ±4 g, ±20 g, ±40 g (optional)	300°/sec (standard) ±75, ±150, ±900 (optional)	±8 Gauss
<b>Non-linearity</b>	±0.02 % fs	±0.02% fs	±0.3% fs
<b>Resolution</b>	0.02 mg (+/- 8 g)	<0.003°/sec (300 dps)	--
<b>Bias instability</b>	±0.04 mg	8°/hr	--
<b>Initial bias error</b>	±0.002 g	±0.04°/sec	±0.003 Gauss
<b>Scale factor stability</b>	0.03%	±0.05%	±0.1%
<b>Noise density</b>	20 µg/√Hz (2 g)	0.005°/sec/√Hz (300°/sec)	400 µGauss/√Hz
<b>Alignment error</b>	±0.05°	±0.08°	±0.05°
<b>Bandwidth</b>	225 Hz	250 Hz	--
<b>Offset error over temperature</b>	0.06% (typ)	0.04% (typ)	--
<b>Gain error over temperature</b>	0.03% (typ)	0.03% (typ)	--
<b>Vibration induced noise</b>	--	0.072°/s RMS/g RMS	--
<b>Vibration rectification error (VRE)</b>	--	0.001°/s/g <sup>2</sup> RMS	--
<b>IMU filtering</b>	Digital sigma-delta ADC sampled at 1kHz and 4kHz. 4kHz data averaged to 1kHz nominal sampling rate. Scaled into physical units at 1kHz. User adjustable IIR filter available for 1kHz data. Coning and sculling integrals computed at 1kHz.		
<b>Sampling rate</b>	1 kHz	4 kHz	100 Hz
<b>IMU data output rate</b>	1 Hz to 1 kHz		
Pressure Altimeter			
<b>Altitude Range</b>	1260-260 mB (hPa) (-500 to 10,000m)		
<b>Resolution</b>	0.01 hPa RMS		
<b>Relative Accuracy</b>	±0.1 mB, over the range 800-1000mB @ T=25°C		
<b>Sampling rate</b>	25 Hz		

Computed Outputs	
<b>Attitude accuracy</b>	EKF outputs: ±0.25° RMS roll and pitch, ±0.8° RMS heading (typ) CF outputs: ±0.5° RMS roll and pitch, ±1.5° RMS heading (typ)
<b>Attitude heading range</b>	360° about all axes
<b>Attitude resolution</b>	< 0.01°
<b>Attitude repeatability</b>	0.2° (typ)
<b>Calculation update rate</b>	500 Hz
<b>Computed data output rate</b>	EKF outputs: 1 Hz to 500 Hz CF outputs: 1 Hz to 1000 Hz
Operating Parameters	
<b>Communication</b>	USB 2.0 (full speed) RS232 (9,600 bps to 921,600 bps, default 115,200)
<b>Power source</b>	+4 to +36 V dc
<b>Power consumption</b>	500 mW (typ)
<b>Operating temperature</b>	-40°C to +85°C
<b>Mechanical shock limit</b>	500g/1ms
<b>MTBF</b>	557,280 hours (Telcordia method, GM/35C)
Physical Specifications	
<b>Dimensions</b>	36.0 mm x 36.6 mm x 11.1mm
<b>Weight</b>	16.5 grams
<b>Enclosure material</b>	Aluminum
<b>Regulatory compliance</b>	ROHS, CE
Integration	
<b>Connectors</b>	Data/power output: micro-DB9
<b>Software</b>	SensorConnect and MIP Monitor software included; Windows XP/Vista/7/8/10 compatible
<b>Data Communications Protocol (DCP)</b>	Protocol compatibility across GX3, GX4, RQ1, GQ4, GX5 CX5 and CV5 product families
<b>Software development kit (SDK)</b>	MicroStrain Communication Library (MSCL) open source license includes full documentation and sample code.

LORD Sensing MicroStrain

459 Hurricane Lane Suite 102

Williston, VT 05495 • USA

www.microstrain.com

©2019 LORD Corporation Document 8400-0093 (Revision N). Subject to change without notice.

Customer Support Center (in United States & Canada)

Tel: +1.802.862.6629

Email: sensing\_sales@LORD.com | sensing\_support@LORD.com

For a listing of our worldwide locations, visit LORD.com

**LORD SENSING**  
MicroStrain