

MicroStrain Sensing Product Datasheet

3DM-GX5-IMU

Inertial Measurement Unit




The MicroStrain Sensing 3DM-GX5 family of high-performance, industrial-grade inertial sensors provides a wide range of triaxial inertial measurements, computed attitude, and navigation solutions.

In all models, the Inertial Measurement Unit (IMU) includes direct measurement of acceleration and angular rate, and is fully temperature-compensated and calibrated over the operating temperature. The use of Micro-Electro-Mechanical System (MEMS) technology allows for highly accurate, small, lightweight devices.

SensorConnect software is a user friendly program for device configuration. MIP Monitor (MicroStrain Internet Protocol) can also be used. Both packages provide for device configuration, live data monitoring, and recording. Alternatively, the MIP Data Communications Protocol is available for development of custom interfaces and easy OEM integration.

The sensor operates independent of computer platform, operating system, or coding language.

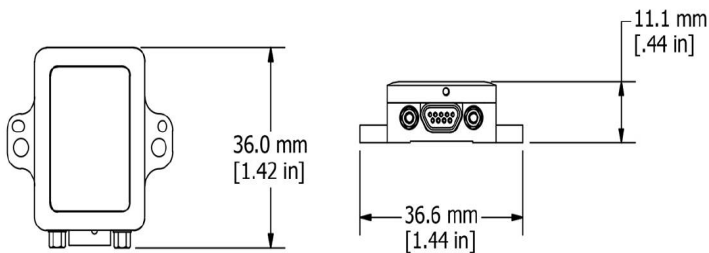

PRODUCT HIGHLIGHTS

- Triaxial accelerometer, gyroscope, temperature sensors achieve the optimal combination of measurement qualities
- Smallest, lightest, highest performance IMU in its class

FEATURES AND BENEFITS

BEST IN CLASS PERFORMANCE

- Fully calibrated, temperature-compensated, and mathematically-aligned to an orthogonal coordinate system for highly accurate outputs
- High-performance, low-drift gyros with low noise density and Vibrational Rectification Error
- Accelerometer noise as low as 20 $\mu\text{g}/\sqrt{\text{Hz}}$

EASE OF USE

- SensorConnect enables simple device configuration, live data monitoring, and recording
- The MSCL API allows easy integration with C++, Python, .NET, C#, Visual Basic, LabVIEW and MATLAB environments. Robust, forward compatible MIP packet protocol
- MIP open byte level communication protocol

COST EFFECTIVE

- Out-of-the box solution reduces development time
- Volume discounts

APPLICATIONS

- Unmanned vehicle navigation
- Robotics
- Platform stabilization, artificial horizon
- Health and usage monitoring of vehicles

Inertial Measurement Unit (IMU)

Specifications

General		
Integrated Sensors	Triaxial accelerometer, triaxial gyroscope, and temperature sensors	
Data Outputs	Inertial Measurement Unit (IMU) outputs: acceleration, angular rate, ambient pressure, Delta-theta, Delta-velocity	
Inertial Measurement Unit (IMU) Sensor Outputs		
	Accelerometer	Gyroscope
Measurement range	±8 g (standard) ±2 g, ±4 g, ±20 g, ±40 g (optional)	300°/sec (standard) ±75, ±150, ±900 (optional)
Non-linearity	±0.02 % fs	±0.02% fs
Resolution	0.02 mg (+/- 8 g)	<0.003°/sec (300 dps)
Bias instability	±0.04 mg	8°/hr
Initial bias error	±0.002 g	±0.04°/sec
Scale factor stability	0.03%	±0.05%
Noise density	20 µg/√Hz (2 g)	0.005°/sec/√Hz (300°/sec)
Alignment error	±0.05°	±0.05°
Bandwidth	225 Hz	250 Hz
Offset error over temperature	0.06% (typ)	0.04% (typ)
Gain error over temperature	0.03% (typ)	0.03% (typ)
Vibration induced noise	--	0.072°/s RMS/g RMS
Vibration rectification error (VRE)	0.03%	0.001°/s/g² RMS
IMU filtering	Digital sigma-delta ADC sampled at 1kHz and 4kHz. 4kHz data averaged to 1kHz nominal sampling rate. Scaled into physical units at 1kHz. User adjustable IIR filter available for 1kHz data. Coning and sculling integrals computed at 1kHz.	
Sampling rate	1 kHz	4 kHz
IMU data output rate	1 Hz to 1000 Hz	

Operating Parameters	
Communication	RS232 (9,600 bps to 921,600 bps, default 115,200)
Power source	+4 to +36 V dc
Power consumption	300 mW (typ)
Operating temperature	-40°C to +85°C
Mechanical shock limit	500g/1ms absolute maximum survivability.*
MTBF	557,280 hours (Telcordia method, GM/35C)
Physical Specifications	
Dimensions	36.0 mm x 36.6 mm x 11 mm
Weight	16.5 grams
Enclosure material	Aluminum
Regulatory compliance	CE, REACH, ROHS
Integration	
Connectors	Data/power: Micro-D9
Software	SensorConnect and MIP Monitor software included; Windows XP/Vista/7/8/10 compatible
Data Communications Protocol (DCP)	Protocol compatibility across GX3, GX4, RQ1, GQ4, GX5 CX5 and CV5 product families
Software development kit (SDK)	MicroStrain Communication Library (MSCL) open source license includes full documentation and sample code.

*Prolonged exposure to >2x full scale range can result in permanent damage. See manual for details



Parker Hannifin Corporation
MicroStrain Sensing
 459 Hurricane Lane
 Williston, VT 05495 · USA

phone: +1.802.862.6629
 email: sensing_sales@LORD.com
 sensing_support@LORD.com
 www.microstrain.com
 www.parker.com