

# MicroStrain Quick Start Guide: 3DM-GX5-25 AHRS

**The 3DM-GX5-25 Attitude and Heading Reference System (AHRS)** is the smallest and lightest industrial AHRS with an Adaptive Extended Kalman Filter available. Congratulations on your purchase.

Let's get started:




The 3DM-GX5-25 communicates through a serial connection and is monitored by a host computer. Sensor measurements and computed outputs can be viewed and recorded with SensorConnect software, available as a free download from the LORD Sensing website. Alternatively, users can write custom software with the open source data communication protocol, also available on the site. Data is time-aligned and available by either polling or continuous stream.



The sensor and connectivity kit are purchased separately. There are two variations of the kit, USB cable (p/n 6212-3004) and RS232 communications and global power (p/n 6212-3001). **This guide assumes that you have a connectivity kit and will download the latest version of SensorConnect™ software.**

## Step 1:

Download and install the latest SensorConnect™ software:  
[http://updates.microstrain.com/SensorConnect\\_12.3.0\\_x64.msi](http://updates.microstrain.com/SensorConnect_12.3.0_x64.msi)



## Step 2:

Unpack the sensor and connectivity kit.

## Step 3:


Attach the interface cable to the sensor. If you are using the RS232 version, you must also plug the power supply into the power jack on the RS232 DB9 connector, and then plug it into AC power.

## Step 4:

Plug the interface cable into the appropriate computer input. The green LED on the sensor should first blink, then pulse slowly to indicate it is in the idle mode. Sensors are factory-set to idle mode.


## Step 5:

Start SensorConnect. The first thing you must do is create a repository file to which you will store settings and data. Click 'home' to bring up this screen:

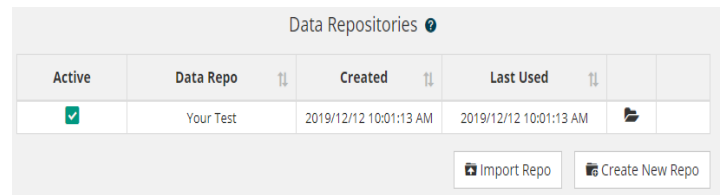

## Step 6:

If you are using a USB interface, the sensor will initiate communications with SensorConnect automatically. This is indicated by a green dot just right of the sensor name. You will also notice that the green LED on the sensor is blinking rapidly, indicating active communications. Click on 'devices' to see this on screen:

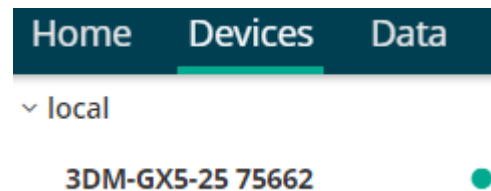

# MicroStrain Quick Start Guide: 3DM-GX5-25 AHRS

## Step 7:

If you are using RS232, click on Devices, and '+ Add Device'.

Name	IP Address	Port	Port
W020000000090353	10.6.11.95	5000	5000

Select serial, and identify your serial port. Clicking the port select arrow should identify available comm's ports. Sensors are factory set to 115200 baud. Click Add Device, and Done:

Connection: Serial

Port: COM15

Baud Rate: 115200

## Step 8:

Close that window, and click on your device to see settings:

Options  
Settings and operations for your device.

Devices / 3DM-GX5-25 75662

Control

- Sampling
- Set To Idle
- Resume

Setup

- Configure
- Initialize/Reset Estimation Filter
- UART Baud Rate: 115200
- Save/Load Settings

Advanced

- Calibration Report
- Monitor Bytes

## Step 9:

Click on sampling, + add channel field, and Attitude (Euler RPY). Set data rate to 10Hz or higher. Then click "apply" and "start"

### IMU

Time Field:  GPS Correlation Timestamp 10Hz

Channel Field	Data Rate
Attitude (Euler RPY)	10Hz
+ Add Channel Field	

## Step 10:

Click on Data, and +Add Widget.

Home Devices Data

Channels Settings + Add Widget

## Step 11:

Click on 3D Model.

+ Add Widget

Time Series Linear Gauge Radial Gauge Numeric Display

FFT Gauge Text Chart Status Indicator Thermometer


3D Model Histogram Principal Strain Notes

Matrix Display

Hold **Ctrl** To Add Multiple Widgets

## Step 12:


Your screen will look like this:

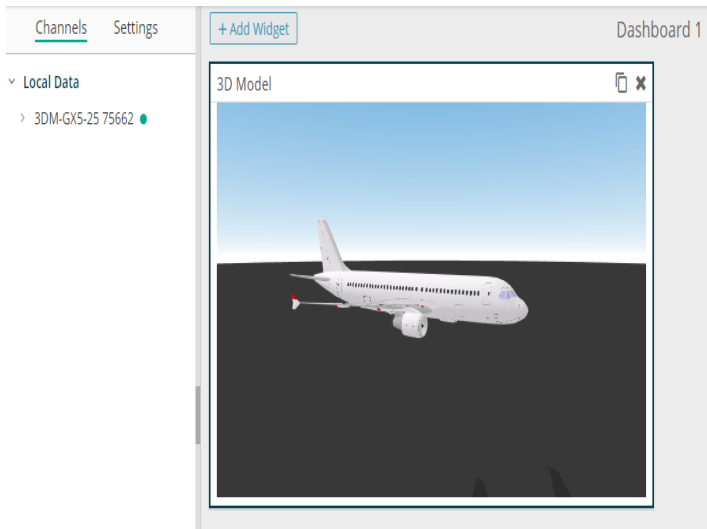

## Step 14:

Test the linkage to the widget aircraft...pick up the sensor, and move it in 3 axes. The plane should respond.


Now you know that your sensor is working, and you're in command. Let's add some other widgets. Click on + Add Widget, and select Linear Gauge. Click on the Gauge icon, and select the Roll data channel, in the local data list:

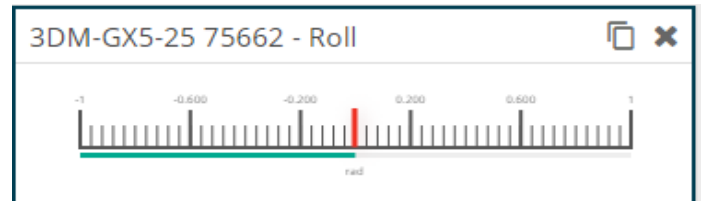


The X icon will close this gauge. The page icon to its left will make duplicates.

## Step 13:


Now let's get data into the model. Under Channels, click on local data, and click on your device. There will be a green dot alongside the sensor name, indicating that it's connected.

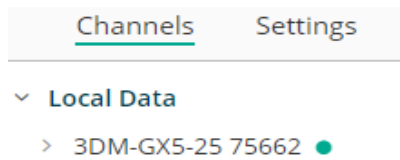

Clicking on your sensor will bring up a selection of data channels. Click on Roll, Pitch and Yaw:

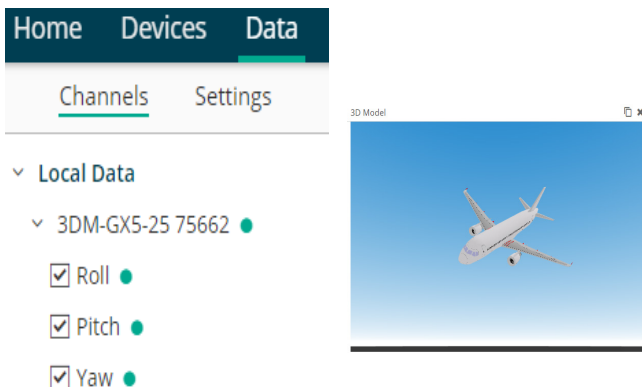

Click on the duplicate icon twice, and place two more linear gauges. Click on each of them, and select pitch and yaw data. You'll see the gauge displays move, as you manipulate the sensor.

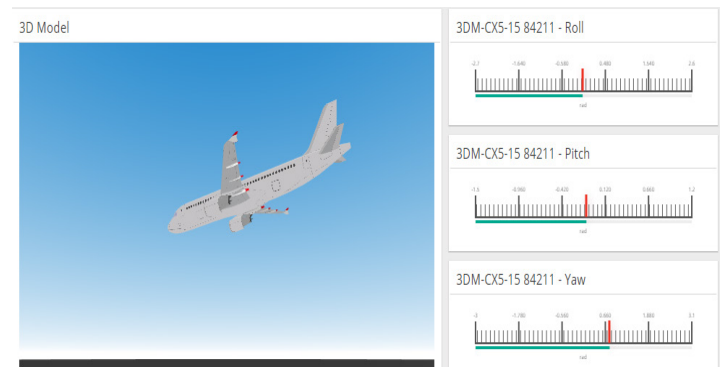

## Step 15:

There is one last step to consider, before exploring SensorConnect further, or in incorporating the sensor into your own data handling system.

Click on Devices, and select Monitor Bytes. You can see streaming data:

3DM-GX5-25 75662 byte monitoring

Record to file:

```
92 0E 12 40 A0 66 33 B6 45 A1 CB 00 00 00 04 A6  
FA  
Read - 2019-12-20 15:46:05.620869632  
75  
Read - 2019-12-20 15:46:05.620910080  
65 80 1C 0E 0C BA 47 E2 A2 3A 31 14 D4 3F 6D FC  
4C 0E 12 40 A0 66 38 D4 FD F3 B6 00 00 00 04 78  
E1  
Read - 2019-12-20 15:46:05.632783872  
75  
Read - 2019-12-20 15:46:05.632819456  
65 80 1C 0E 0C BA 4B 79 79 3A 35 6D B3 3F 6D FC  
84 0E 12 40 A0 66 3D F3 B6 45 A2 00 00  
Read - 2019-12-20 15:46:05.638837248  
00  
Read - 2019-12-20 15:46:05.638853376  
04 79 97 75 65 80 1C 0E 0C BA 47 48 33 3A 32 67  
DF 3F 6D FB C1 0E 12 40 A0 66 43 12 6E 97 8D 00  
00 00 04 77 1A
```

Pin to Bottom Clear

## Step 16:

When you're done exploring SensorConnect, click on Home, and select a data repository to save your setup and data.

Active	Data Repo	Created	Last Used	
<input checked="" type="checkbox"/>	TEST	2019/12/20 10:31:06 AM	2019/12/20 10:31:06 AM	

Now, you're ready to put your sensor to work in your application. For sensor pinout and other details, refer to the user manual, which is found on the MicroStrain website:

<https://www.microstrain.com/inertial/3dm-cx5-45>

Additional information about MicroStrain data communications software and related information will be found by scrolling down to DOCUMENTATION.

Details about other MicroStrain software can be found here: <https://www.microstrain.com/software#web>