



Making Drone Fleets Energy Efficient

A Case Study by Parker LORD

Parker LORD sponsors research to model energy consumption for quadcopter package delivery drones


Retailers are offering ever-shorter delivery times to online shoppers—in the case of Amazon groceries, deliveries can be promised in as little as two-hours. These tight delivery windows demand new strategies for last mile delivery.

Last mile delivery is the final stage of distribution, in which a product is moved from its final warehouse location to the customer's doorstep, and it presents a challenge for retailers. Using numerous delivery trucks can be too cumbersome at the distribution center location, which is often an urban lot, as well as in consumer neighborhoods.

Drones, with their small size, low operational costs, and modest environmental footprint, offer an alternative to truck delivery. Recent market reports indicate that commercial drone market share is growing rapidly.

As drone use increases, in turn driving demand for the construction of more distribution centers, the networks will become complex. Researchers and companies are currently exploring the logistics that will be necessary to support these networks.

Part of the solution will be to ensure the efficiency of drone traffic by optimizing power consumption. Energy efficiency is not only a goal in and of itself; energy availability determines a drone's flight duration and achieving the longest possible duration is fundamental to the business model of drone delivery.

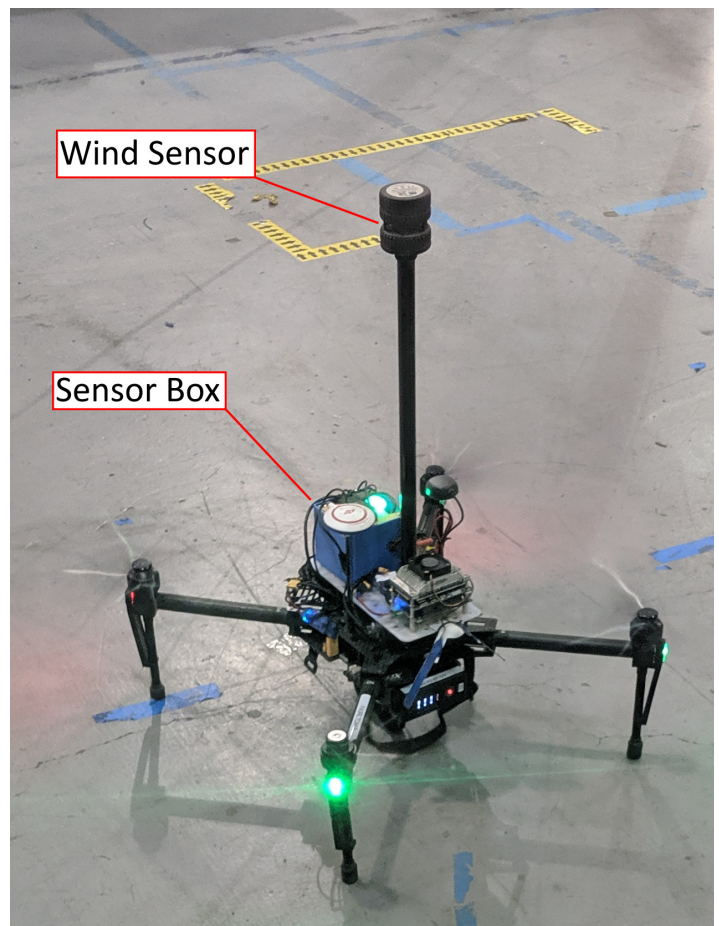

ENGINEERING YOUR SUCCESS.

How Carnegie Mellon models package delivery drone energy usage

The Carnegie Mellon University Robotics Institute developed a detailed analytical model to estimate the energy usage of drone-based systems, focused on last mile deliveries in urban areas. The model mathematically calculates a drone's dynamic behavior and its various power requirements, such as the power required to overcome the force of gravity and the power required to overcome drag from the rotating propeller blades.

It considers factors such as wind that affect drone performance in the real world. Parker LORD sponsored the Institute's efforts by donating a **3DMGX5-GNSS/INS** sensor, one of our high-performance navigation sensors.

To evaluate the accuracy of their energy model, researchers at the Institute conducted a series of quadcopter unmanned aerial vehicle (UAV) test flights to empirically measure their energy consumption.


The quadcopter was equipped with a sensor suite, including a MicroStrain **3DMGX5-GNSS/INS** inertial sensor which features a GNSS receiver and measures position, velocity, and attitude using magnetometer, gyroscope, and accelerometer readings. These measurements empowered the research team to record the state of the system during drone flight tests.

The research team conducted quadcopter test flights using a pre-established route by altering the quadcopter's altitude, speed, and payload weight. These factors were tested in various combinations for a total of 180 flights. Data collected during the test flights showed the Institute's energy model to have 80 percent accuracy.


The Institute will continue its work, collecting additional random test datasets and comparing them against



blackbox approaches that use deep recurrent neural networks (RNNs). The team also expects to test other types of aerial systems, along with fixed wing aircraft, providing a unified framework for aerial vehicle energy estimations. Parker LORD is proud to continue its support of these efforts, contributing to the development and viability of drone delivery.

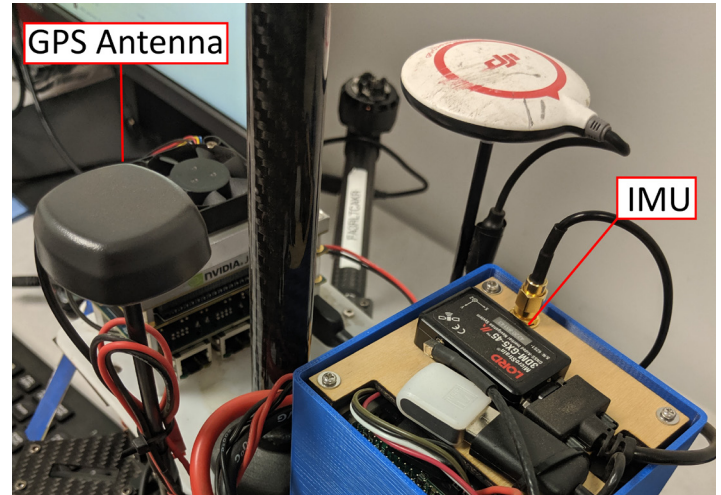

As our work with the Carnegie Mellon University Robotics Institute demonstrates, Parker LORD has the expertise to be involved at any step of a product's design cycle, beginning with R&D and testing. Find out more at <https://www.microstrain.com/inertial-sensors/g-series>.

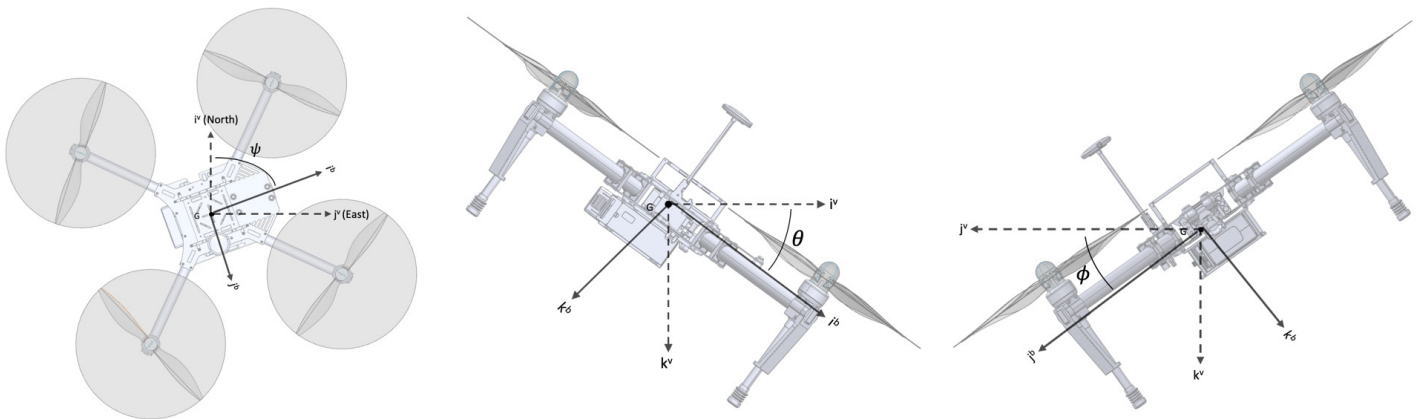

©2020 Parker Hannifin



ENGINEERING YOUR SUCCESS.