

TC-Link[®]-200

Wireless 12-Channel Thermocouple Node



The TC-Link[®]-200 is a 12-channel wireless sensor used for precise measurement of thermocouples. No calibration is required. Select the thermocouple type and the node will output accurate, low noise temperature or mV data.

Wireless sensing eliminates the time and complexity of running long wires. Additionally, the TC-Link-200's high channel count reduces the total cost per channel over many hard-wired DAQs.

Lord wireless sensor networks are fast to deploy and provide reliable, lossless data collection. SensorConnect software can be used for device configuration, live data monitoring, and data analysis. SensorCloud is Lord's optional cloud-based platform that optimizes data aggregation, analysis, and alerts for sensor data collected from remote networks.

HIGH PERFORMANCE SENSING

- 12 Thermocouple input channels
- On-board linearization algorithms
- On-board cold junction compensation (CJC)
- Digital filtering for up to 120 dB rejection of 50 and 60 Hz noise
- Open circuit detection

RELIABLE DATA COLLECTION

- **Lossless, synchronized, and scalable** networks using LXRS and LXRS+ protocol
- Remotely configure nodes and view sensor data using SensorConnect (PC), SensorCloud (web), or MSCL (API library)
- Low battery detection

CONFIGURABLE FOR MANY APPLICATIONS

- Report temperature or mV
- Up to 128 Hz sampling
- Continuous or event-triggered operation
- Transmit data real-time and/or save to onboard memory

RUGGED

- Polycarbonate enclosure
- Bolt-down or DIN rail mounting
- -40 to +85°C operating temperature
- 4kV ESD protection

APPLICATIONS


- Thermal profiling
- Refrigeration monitoring
- Production process monitoring
- Quality control
- Environmental monitoring
- Condition Based Monitoring (CBM)





TC-Link[®]-200 12-Channel Wireless Thermocouple Node

Specifications

| General | |
|---|---|
| Sensor input channels | Thermocouple, 12 channels |
| Integrated sensors | Temperature CJC, 1 channel |
| Digital filter | Adjustable low pass filter with up to 120 dB 50/60 Hz rejection |
| Thermocouple Input | |
| Measurement range | -210°C to 1820°C (thermocouple type dependent) |
| Initial Accuracy | ±0.25°C (20 to 70°C node temperature) ±0.5°C (-40 to 85°C node temperature) |
| Resolution | 24 bit |
| Noise | +/- 0.01°C typical with K-type thermocouple and default 12Hz filter at 20°C |
| Compatible types | J, K, N, R, S, T, E and B |
| Integrated Cold Junction Compensation (CJC) Channel | |
| Compensation range | -40°C to 85°C (0°C to 85°C for type B Thermocouples) |
| Accuracy | ±0.13°C (20°C to 70°C), ±0.25°C (-40°C to 85°C) |
| Resolution | 0.02°C |
| Sampling | |
| Sampling modes | Continuous and event triggered |
| Output options | Temperature, mV, or custom |
| Sampling rates | 1 S/hr to 128 SPS (1 channel) 1 S/hr to 32 SPS (12 channel) |
| Network capacity | Up to 128 nodes per RF channel (bandwidth calculator) microstrain.com/configure-your-system |
| Node synchronization | ±50 µsec |
| Data storage capacity | 16 MB (up to 4,000,000 data points) |
| Operating Parameters | |
| Battery power | 4 AA batteries in series. Total voltage between 3.4 V and 36 V |
| Battery lifetime | https://www.microstrain.com/wireless/tc-link-200 |
| External power | 4 V to 36 V DC |
| Wireless communication range | Outdoor/line-of-sight: 2 km (ideal), 800 m (typical) Onboard antenna: 1 km (ideal), 400 (typical) Indoor/obstructions: 50 m (typical) |
| Radio frequency (RF) transceiver carrier | License-free 2.405 to 2.480 GHz (16 channels) |
| RF transmit power | User-settable 0 dBm to 20 dBm (restricted regionally) |
| Operating temperature | -40°C to +85°C |
| ESD | 4 kV |
| Mechanical Shock Limit | 250g/1.5ms with batteries installed 500g/1.5ms without batteries installed (external power source) |
| Physical Specifications | |
| Dimensions | 129 mm x 117.6 mm x 31 mm (including antenna) |
| Interface | Screw-down terminal |
| Weight | 283 grams (with batteries), 217 grams (without batteries) |
| Integration | |
| Compatible gateways | All WSDA gateways |
| Software | SensorCloud, SensorConnect, Windows 7, 8 & 10 compatible |
| Software development kit | microstrain.com/software/mscl |
| Regulatory compliance | FCC (U.S.), IC (Canada), CE, ROHAS (European Union) MIC (Japan, IMDA (Singapore)) |



Thermocouple

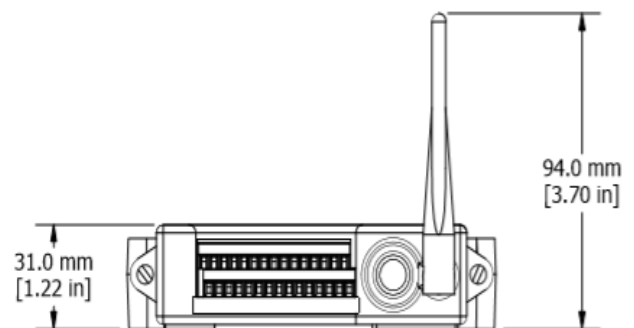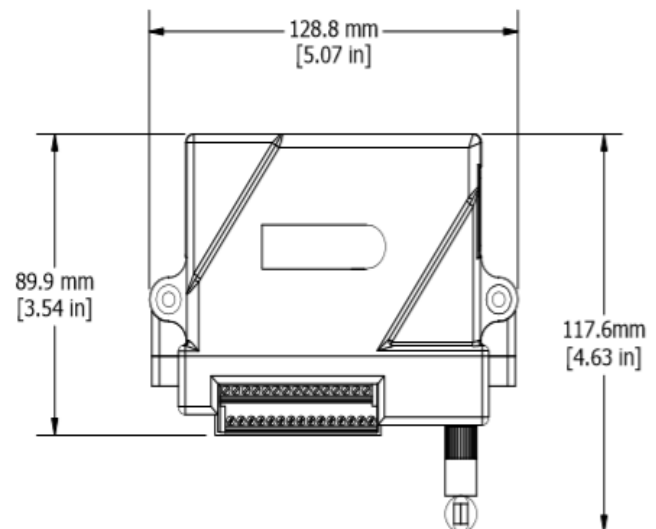

LORD Sensing MicroStrain
459 Hurricane Lane Suite 102
Williston, VT 05495 • USA
www.microstrain.com

Customer Support Center (in United States & Canada)
Tel: +1.802.862.6629
Email: sensing_sales@LORD.com | sensing_support@LORD.com
For a listing of our worldwide locations, visit LORD.com

©2019 LORD Corporation | Document 8400-0128 (Revision -B). Subject to change without notice.

LORD SENSING
MicroStrain